


- \* **Cat. 1 Wind Load = 250N**
- \* **Cat. 2 Wind Load = 300N**
- \* **Cat. 3 Wind Load = 750N**

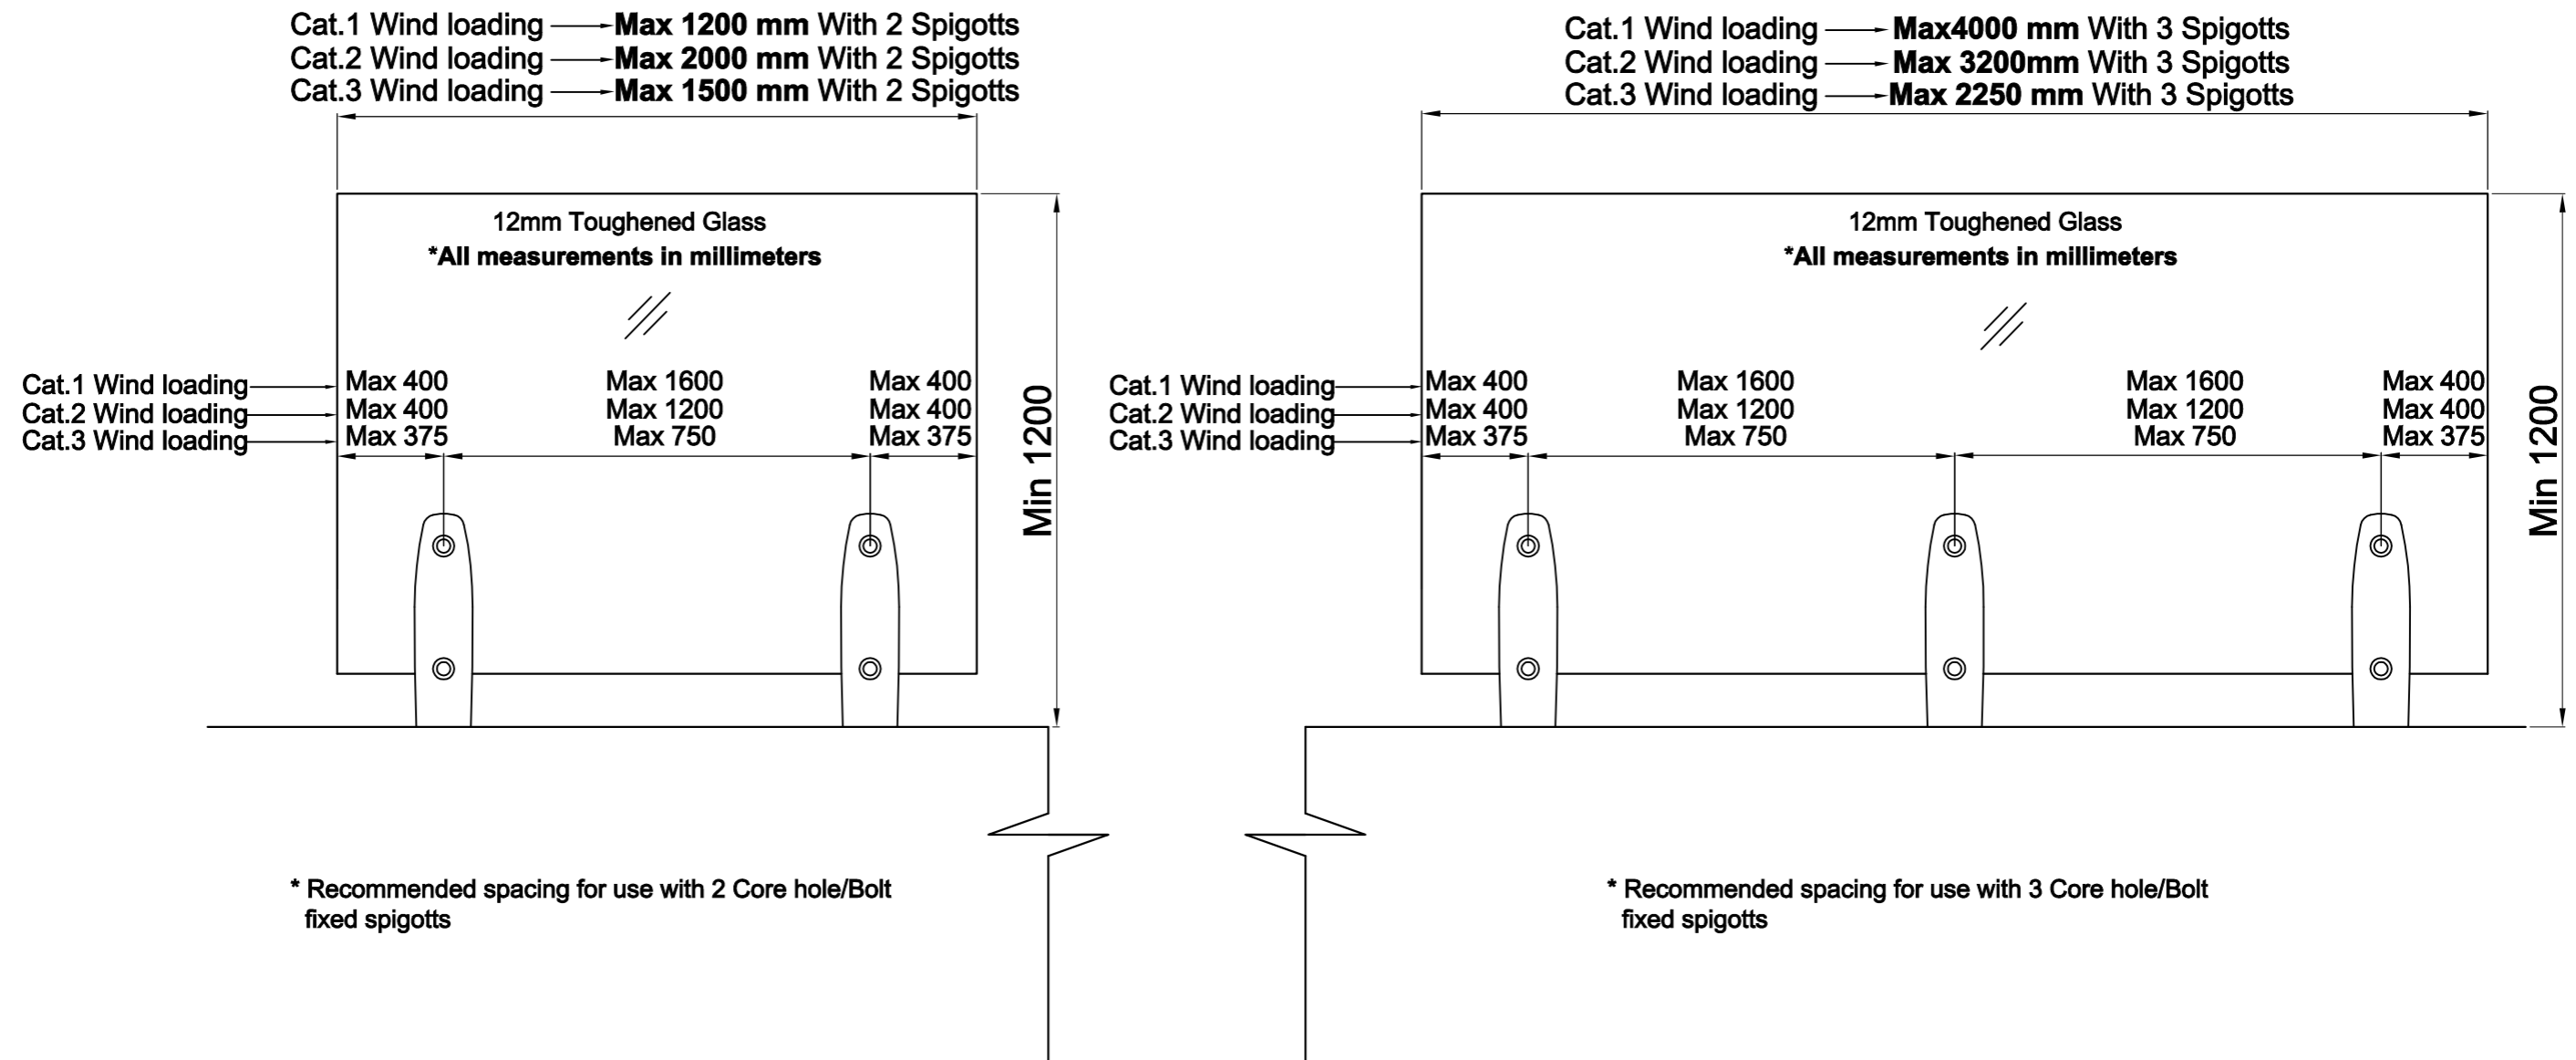

- \* Recommended Measurements for **Frameless Pool Fence** to comply with Balustrade Standard **AS1926**.
- \* Appendix C of AS1296.1.1993 refers to the maximum load of 250N at weakest point.
- \* AS 1170.1 refers to design principles for wind load.
- \* All LISUS frameless spigotts has been tested to 12 KN load with negligible deflection.