


- * **Cat. 1 Wind Load = 250N**
- * **Cat. 2 Wind Load = 300N**
- * **Cat. 3 Wind Load = 750N**

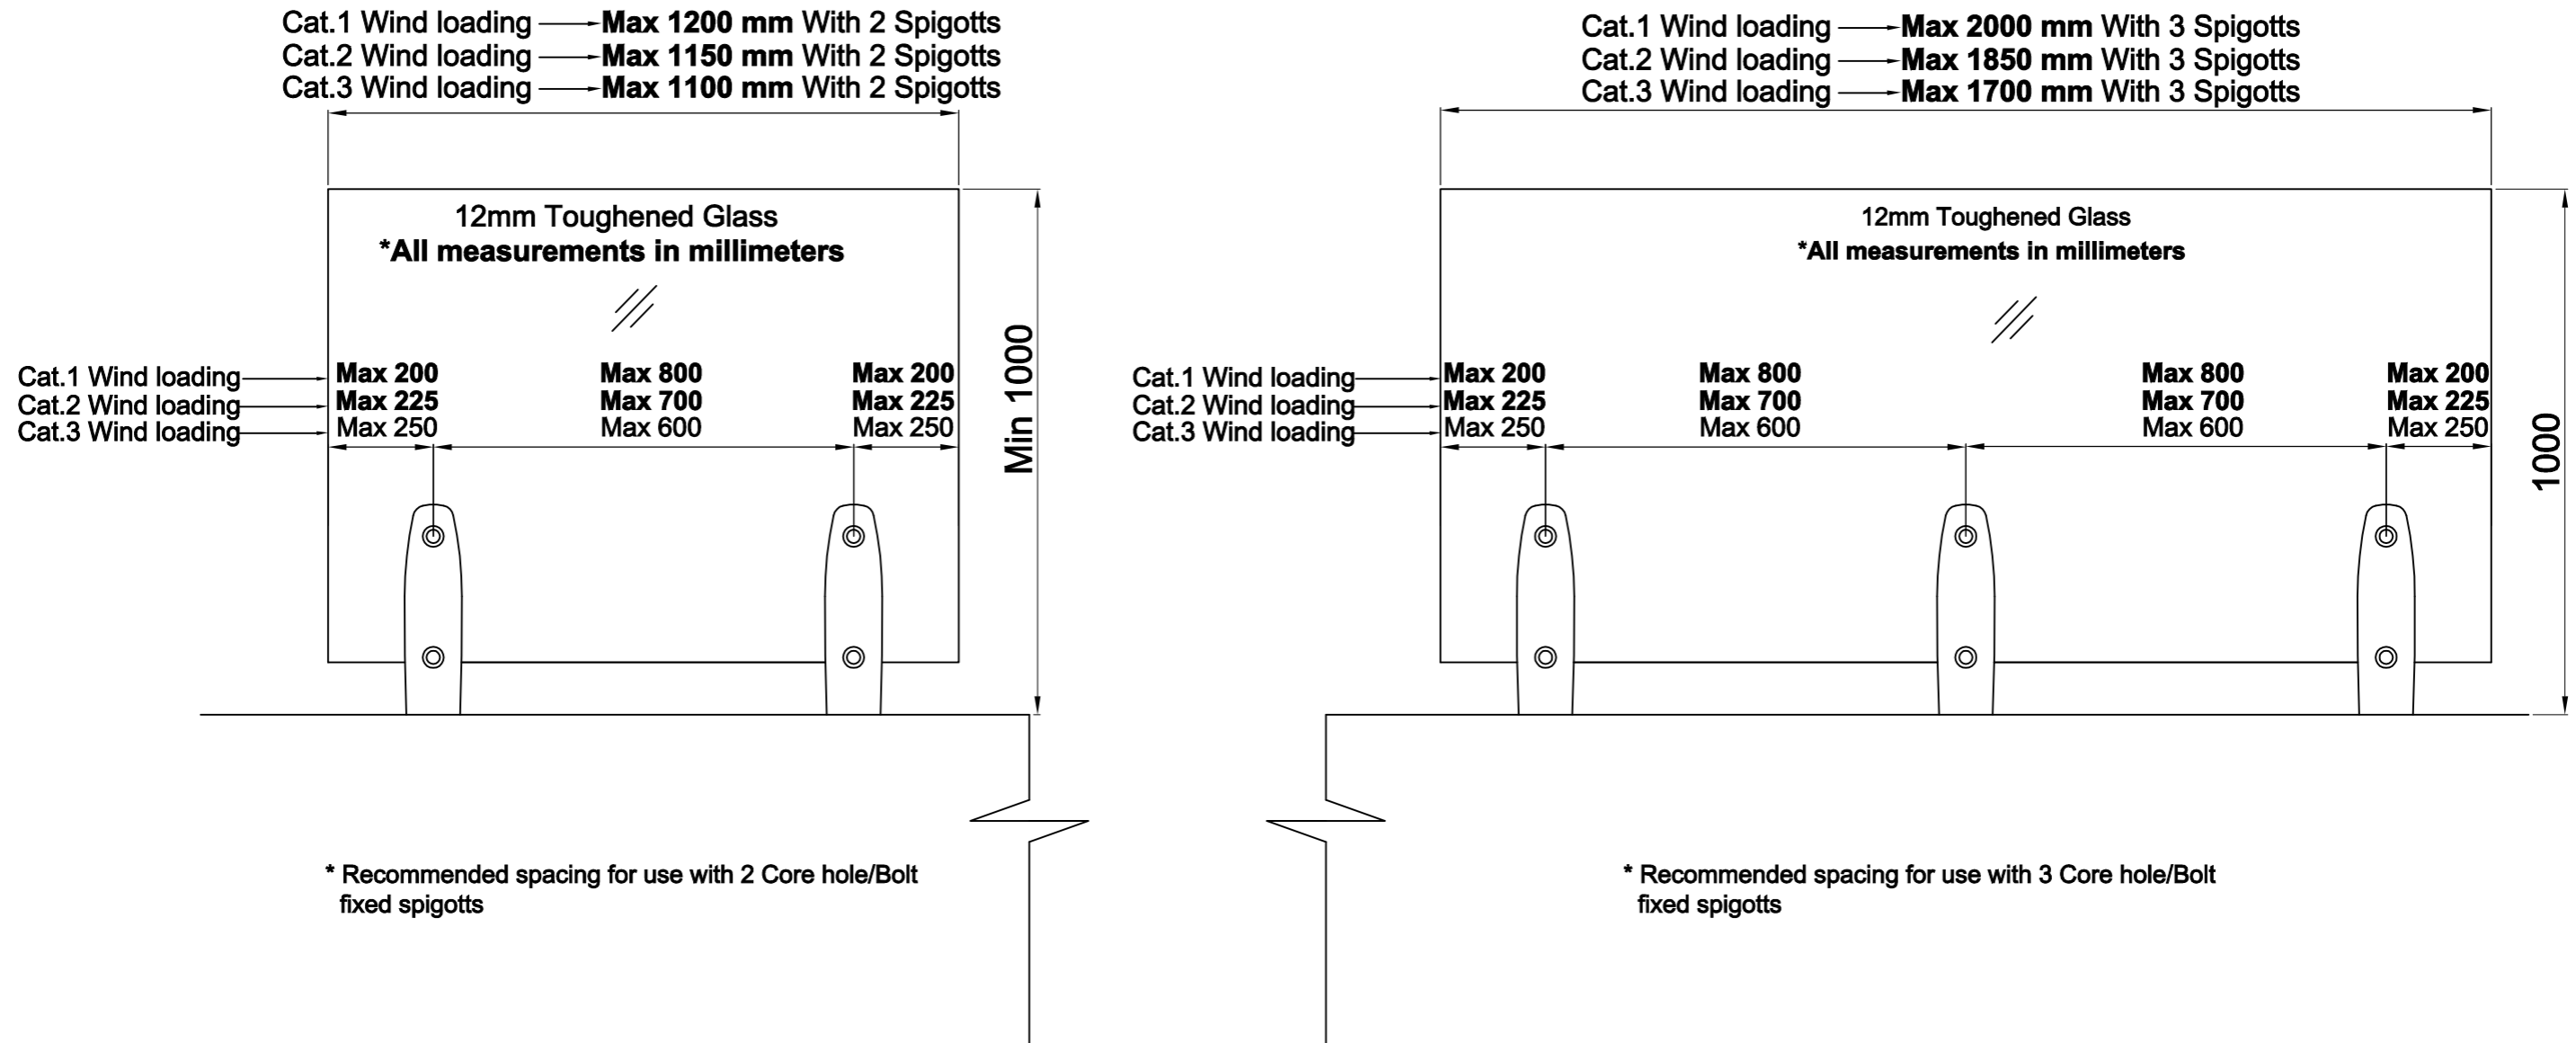

* Recommended Measurements for **Frameless Glass Balustrade** to comply with Balustrade Standard **AS1288**.

* AS 1170.1 refers to design principles of wind load.

* Appendix C of AS1296.1.1993 refers to the maximum load of 250N at weakest point.

* All LISUS frameless spigotts has been tested to 12 KN load with negligible deflection.